



AVerVision CP300



Product Specifications




Image Sensor	1/2" CMOS
Total Pixels	3.2M Pixels
Output Resolution	WXGA (1280 x 720)
Lens	f1 = 9.6mm
Zoom	16X Total Zoom (2X AVerZoom™+ 8X Digital Zoom)
Frame Rate	24fps (Max.)
Focus	Auto/ Manual
Shooting Area	A4 Landscape
Image Rotation	Camera Head 0°/ 90°/-90°
Image Storage	Built-in Memory (Max: 80)
On-Screen Display (OSD)	Provided
Image Effect	Color/ B/W/ Negative/ Mirror/ Reverse/ Freeze
Image Adjust. (White Balance/Exposure/Night View)	Auto/ Manual
AVerPresenter	Provided (AVerVisor and AVerBox)
Split Screen	Provided (Vertical & Horizontal)
Picture-in-Picture	Provided
Display Mode	Text/ Graphics/ High Frame
Capture Mode	Single/Continuous
Profile	Provided
Timer	Provided
Flicker Filter Control	2 Levels
Remote Control	Provided (With Laser Pointer)
DV-H Output	Provided
VGA Input/Output	Provided (15-Pins D-sub, Pass Through)
S-Video, Composite Video Output	Provided (NTSC or PAL)
RS-232 Port	Provided (With S-Video/RS-232 Adapter Cable)
USB 2.0 Port	Provided (USB Camera/ Built-in Image Download)
Light Source	Embedded LED Lamp
Laser Positioning Guide	Provided
Dimension	Operating: 160mm x 170mm x 450mm Folded: 287.4mm x 232.5mm x 61mm
Net Weight	2.4kg (5.31lbs)
Power Source	AC/DC 100-240V ~ 4A~4.2A, 50-60 Hz
Warranty	3 Year Limited Parts and Labor**
Certifications	FCC, CE

Compatible Operating System

Windows®	2000 (SP4), XP (SP2), Vista (32-bit or 64-bit)
Macintosh®	OS 10.3 (Panther), OS 10.4 (Tiger), OS 10.5 (Leopard)

Package Content


AVerVision CP300	S-Video/RS-232 Adapter Cable
Power Adapter & Cord	AVerVision Software CD
VGA Cable	Anti-Glare Sheet
S-Video Cable	Warranty Card
USB Cable	Remote Control with Batteries
RCA Cable	Carrying Bag
User Manual	

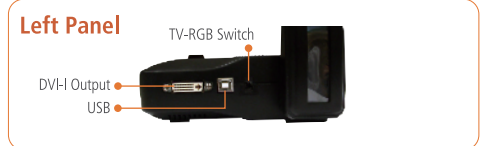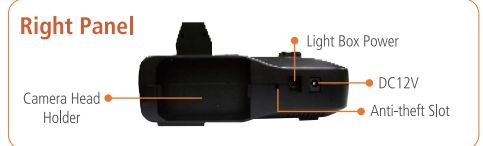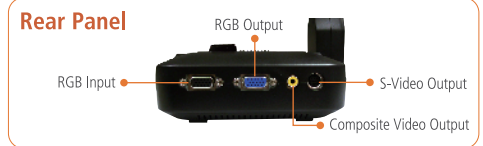

Optional Accessories



Distributor / Dealer :

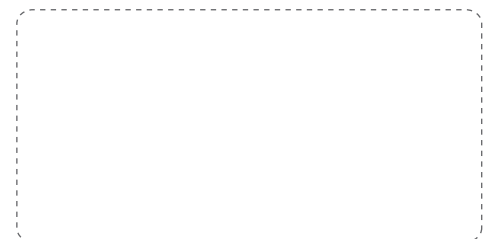

* Please refer to warranty card