

Epson
EMP 1825/1810

EPSON[®]
EXCEED YOUR VISION

Epson
EMP 1825/1810



Captivate your audience
with the ultimate multimedia projector



Enhance your presentations using the ultimate Epson EMP-1825 projector

The Epson EMP-1825 projector makes superb presentations easy with Quick Setup and a range of features for PC-less, networked and wireless presenting.

It is the ideal presenting partner to project clear images even in a bright meeting room. Whether in a fixed setting or on the move, engage your audience and keep your business partners focused.

EasyMP™ *


Go for new levels of versatility and style with Epson EasyMP™ technology. Rely on its innovative and flexible features to impress your audience.

Wired or wireless connection

Easily connect your Epson EMP-1825 projector to your local network. Present directly and securely through a wired or wireless network. It is also possible to send animation data with sound.

Multi screen display

Optimise your presentations: transmit to up to four projectors at the same time using a single PC. Opt either for a large panoramic image or for four independent pictures from different applications.

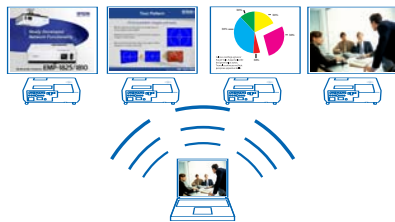


Advanced security

Epson provide the best wireless security available to ensure that you control access to your data and presentation (E.g.: WEP, WPA-PSK, PEAP, LEAP).


PC-less technology

Go light, leave your PC behind. Simply plug in your USB key or Compact Flash memory card and start your presentation. Rewrite the card using the network while it is still in the projector.

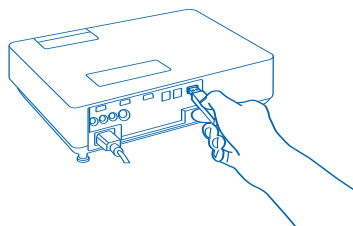

Easy maintenance (LAN)

Check and control the settings of all the networked projectors from only one PC. The Epson EMP Monitor™ software enables you to configure and operate the projector remotely over your network. You can even send an e-mail alert for the internal temperature of your projector, or to monitor lamp status, in order to prevent any possible problems disrupting presentations.




* Only available on Epson EMP-1825

Quick Setup Function

Achieve a bright and uniform image in 6 seconds.

Simply press the "Quick Setup" button and the projector will create a perfectly square image. The screen frame detection technology automatically fits the image to the screen, or if there is no screen, projects a great picture on a wall.

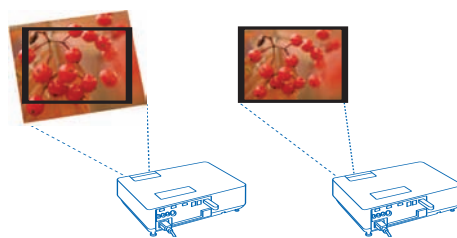

Without Quick Setup

With Quick Setup

Compatible with Windows Vista™ Network Projector function

No need to install any additional applications. You can operate the Epson EMP-1825 projector from a PC with Windows Vista™* "Network Projector" function (WLAN or LAN).

*excluding "Home basic edition"



Make a big impact with the most effective multimedia projector

Epson EMP 1825

Powerful built-in 5W speakers
Play any business content to your audience without external speakers.

Push the **Quick Setup** button and the image will automatically fit the dimensions of the screen in just 6 seconds.

Keep your audience focused with the **A/V Mute Slide** function. It enables you to stop and resume projection easily by opening and closing the sliding lens cover.

Compact Flash Card
Make standalone presentations or photo slideshows easy with the Compact Flash Card reader. Data can also be rewritten via the local network. CF cards are also an easy way to transport files between venues.

Wi-Fi connection
High speed wireless connectivity at up to 54 Mb/s. Connect your PC to up to four projectors without any cable.

- **Dazzle your audience:**
Run up to four projectors from one PC for panoramic images, or multi-screen presentations. Present directly through wireless or wired networks.
- **Flexible positioning :** Project an 80" image from just 2.35m and use the flexible 1.6x optical zoom.

- **Improved security** with the inclusion of a tough security bar, Kensington lock connectivity and password protection.
- **Soft carry case** for added protection in transit.

3500lm  3.1Kg 

XGA  5W 

Also available Epson EMP 1810



- **Bright, colourful images** with Epson 3LCD technology.
- **Incredible 3500 lumens** brightness packed into just 2.9Kg.
- **Work fast:** only 6 seconds set up.
- **Direct power off :** Instant disconnection of power after presentation. No need to wait for cool down.

3500lm  2.9Kg 

XGA  5W 






| Model | Epson EMP-1825 | Epson EMP-1810 |
|---|--|--|
| Specifications | | |
| Projection system (3LCD) | 0.8-inch with MLA (x3) TFT | 0.8-inch with MLA (x3) TFT |
| Native Resolution | XGA (1024x768) | XGA (1024x768) |
| Native aspect ratio | 4:3 | 4:3 |
| Resolution supported | VGA - UXGA | VGA - UXGA |
| Brightness | High/Low brightness mode: 3500 ANSI lm / 2700 ANSI lm | High/Low brightness mode: 3500 ANSI lm / 2700 ANSI lm |
| Projection lens | | |
| F Number | 1.75 - 2.42 | 1.75 - 2.42 |
| Focal Length | 24.0 mm - 38.2 mm | 24.0 mm - 38.2 mm |
| Focus/Zoom type | Manual focus/ 1.6 x Optical Zoom | Manual focus/ 1.6 x Optical Zoom |
| Offset | 6:1 | 6:1 |
| Lens protection | A/V mute slide | A/V mute slide |
| Lamp Type | 210 W UHE | 210 W UHE |
| Lamp Life | 3000 hours / 2500 hours (Low/High brightness mode) | 3000 hours / 2500 hours (Low/High brightness mode) |
| Colour Reproduction | | |
| Fan noise | Full-Colour (16.77 million colours) Low/High brightness mode: 32 dB / 37 dB | Full-Colour (16.77 million colours) Low/High brightness mode: 32 dB / 37 dB |
| Contrast ratio | 500:1 | 500:1 |
| Screen size (Projection distance) | 30" to 300" [0.83 m to 14.69 m] | 30" to 300" [0.83 m to 14.69 m] |
| Keystone correction | Vertical (automatic): -45 degrees to +45 degrees Horizontal: -30 degrees to +30 degrees | Vertical (automatic): -45 degrees to +45 degrees Horizontal: -30 degrees to +30 degrees |
| Quick Setup | Yes (Auto Quick Corner - 6 seconds) | Yes (Auto Quick Corner - 6 seconds) |
| Input | | |
| Computer | 2xD-sub 15-pin (RGB) | 2xD-sub 15-pin (RGB) |
| Video | 2xD-sub 15-pin (component), 1xRCA, 1xS-Video | 2xD-sub 15-pin (component), 1xRCA, 1xS-Video |
| Audio | 2xStereo mini-jack, 2xRCA (White/Red) | 2xStereo mini-jack, 2xRCA (White/Red) |
| PC-Less function (image, movie, presentation) | 1xUSB type A, 1xCompact Flash (3.3V) | - |
| Control | RS-232C, USB Type B | RS-232C, USB Type B |
| Network | 1xRJ45 (LAN) | - |
| Output | Computer / Audio: 1xD-sub 15-pin / 1xStereo mini-jack | Computer / Audio: 1xD-sub 15-pin / 1xStereo mini-jack |
| Built-in speaker | 5 W monaural | 5 W monaural |
| Direct Power On/Off | Yes | Yes |
| Security | Security bar/Padlock and Kensington lock hole | Security bar/Padlock and Kensington lock hole |
| Other functions | Instant Off, Quick corner adjustment, Source Search, Auto Detection of RGB, Password Protected Function, 8 Colour Modes, High Altitude Mode, User logo, Freeze, A/V Mute slide, E-Zoom, Help, Test Pattern, Fan Stops at Network Standby, Remote ID Function, Multi colour adjustment function, AMX Device Discovery | Instant Off, Quick corner adjustment, Source Search, Auto Detection of RGB, Password Protected Function, 8 Colour Modes, High Altitude Mode, User logo, Freeze, A/V Mute slide, E-Zoom, Help, Test Pattern, Remote ID Function, Multi colour adjustment function |
| Operating temperature / altitude | 5°C to 35°C / 0 to 2,286m (High Altitude Mode over 1500m) | 5°C to 35°C / 0 to 2,286m (High Altitude Mode over 1500m) |
| Power supply wattage | 100 - 240 V AC ±10%, 50/60 Hz | 100 - 240 V AC ±10%, 50/60 Hz |
| Power consumption lamp on | 286W | 286W |
| Power consumption stand-by | 12W (network on) / 4.6W (network off) | 4.6W |
| Weight | 3.1 kg | 2.9 kg |
| Dimension (D x W x H) | 257x 345x 86mm (excluding feet) | 257x 345x 86mm (excluding feet) |
| On-screen menu | 20 languages English, French, German, Italian, Spanish, Portuguese, Russian, Dutch, Danish, Hungarian, Czech, Polish, Norwegian, Finnish, Swedish, Greek, Turkish, Japanese, Chinese, Korean | 20 languages English, French, German, Italian, Spanish, Portuguese, Russian, Dutch, Danish, Hungarian, Czech, Polish, Norwegian, Finnish, Swedish, Greek, Turkish, Japanese, Chinese, Korean |
| Supplied Accessories | | |
| Power Cable | 3m | 3m |
| Computer Cable | 1.8 m D-sub 15pin (Male) - D-sub 15pin (Male) | 1.8 m D-sub 15pin (Male) - D-sub 15pin (Male) |
| USB Cable | 1.8 m, USB A/USB B HI-SPEED | - |
| Soft carry case | included | included |
| Remote Control | With 2xAA type alkaline batteries | With 2xAA type alkaline batteries |
| Epson Projector Software (CD-ROM) | included | included |
| Wireless LAN unit | included 802.11a/11b/11g (WN6501CEP) including 2 x 8mm screws | - |
| Password Protect Sticker | included | included |
| User Manual | included | included |
| Warranty | 3 years | 3 years |




Front view

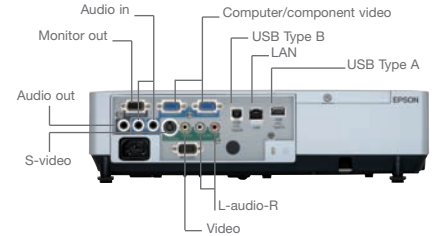

Rear view*

* Epson EMP-1825 only

Screen size and projection distance

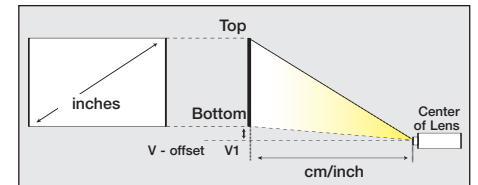

| Screen size | Projection distance 4:3 aspect ratio | | | |
|-------------|--------------------------------------|-----|------|-----|
| | Wide | | Tele | |
| | inch | cm | inch | cm |
| 30 | 83 | 33 | 139 | 55 |
| 40 | 114 | 45 | 189 | 74 |
| 50 | 144 | 57 | 238 | 94 |
| 60 | 174 | 69 | 287 | 113 |
| 80 | 235 | 93 | 386 | 152 |
| 100 | 296 | 117 | 484 | 191 |
| 150 | 449 | 177 | 730 | 288 |
| 200 | 601 | 237 | 977 | 385 |
| 250 | 753 | 297 | 1223 | 481 |
| 300 | 906 | 357 | 1469 | 578 |

| Advanced Functions | EPSON EMP-1825 |
|--|--|
| WINDOWS VISTA™ NETWORK PROJECTOR FUNCTION | Wired or wireless connection between projector and computer with Windows Vista™ operating system (excluding Home Basic edition) |
| EASY MP™ FUNCTIONS | |
| Wired/Wireless connection | Wireless LAN (802.11a/b/g) |
| Wireless connection | WEP, WPA-PSK(TKIP/AES), WPA2-PSK(TKIP/AES) EAP-TLS, PEAP/MS-CHAPv2, EAP-TTLS/MD5, EAP-TTLS/MS-CHAPv2, PEAP/MS-CHAPv2, PEAP/GTC, LEAP, EAP-Fast/MS-CHAPv2, EAP-Fast/GTC |
| Security (Wireless LAN) | Multi-screen display (up to four projectors) with Windows 2000 and XP, Movie sending (MPEG2, WMV), MAC OS 10.3 and 10.4 compatible, WPS |
| Advanced Functions | 1xUSB type B |
| USB Display | |
| PC-less function | 1xUSB type A, 1xCompact Flash (3.3V) |
| Input | IMAGE: .bmp / .jpg / .png / .gif • MOVIE: .mp4 (Video:MPEG4, MPEG4 AVC, Audio: AAC) .mpg (Video: MPEG1, MPEG2 / Audio: MPEG-1 Layer2, PMC) .wmv (Video: WMV8, WMV9 / Audio: WMA, LPCM) • PRESENTATION SCENARIO: .sit (created by Slidemaker2) |
| Supported formats | Transferring or writing files to CF card from network |
| Advanced Functions | |
| Network monitoring and control function | Projector control and projector management via network (wireless or wired LAN) E-mail notification, SNMP, Web control, PJ-Link, Projector Control |
| Function | EMP NS Connection (for Windows and Mac) - EMP Monitor (for Windows) - EMP Slide Maker2 (for Windows) - EPSON Projector Control Software (for Windows) |
| Easy MP Software | |



For further information please contact your local Epson office or visit www.epson-europe.com

Austria 0810/20 01 13 (0,07 €/min.) **Belgium** 070/350 120 (0,1735 €/min.) **Czech** 800/142 052 **Denmark** 44 50 85 85 **Finland** 0201 552 091
France 0892 899 999 (0,34 €/min.) **Germany** 01805/23 41 10 (0,14 €/min.) **Greece** 210-8099499 **Hungary** 06800 147 83 **Ireland** 1 800 409132
Italy 02-660321 10 (0,12 €/min.) **Luxemburg** 900/43010 (0,24 €/min.) **Middle East** +9714 8818934 **Netherlands** 9000-5050808 (0,05 €/oproep + 0,15 €/min.) **Norway** 22 06 42 80 **Poland** 0-0-800 4911299 (0,16 z€/min.) **Portugal** 707 222 111 **Russia** (095) 777-03-55 **Slovakia** 0850 111 429
South Africa (+2711) 465-9621 **Spain** 93 582 15 00 **Sweden** 0771-400135 (Mobilsamtal - 0.99 kr/min., Lokala samtal - 0.30 kr/min., Utlandssamtal - 0.89 kr/min.) **Switzerland** 0848 448820 (4-8 cent/min.) **Turkey** (0212) 3360303 **United Kingdom** 0870 416900

Entity carrying out management and coordination pursuant to article 2497 bis of Civil Code: Epson Europe BV.

EPSON® is a registered trademark of SEIKO EPSON® Corporate. All other product names and other company names used herein are for identification purposes only and may be trademarks or registered trademarks of their respective owners. Errors and omissions excepted, all specifications are subject to change without notice. Screen images are simulated.

