



## Samsung Video Presenter **SVP-5300**



A Portable & Flexible Product for Visual Communications

- Fast USB 2.0 Support For PC Preview & Capture
- Extra Flexibility with Multi-Articulated Design
- Much Sharper Images with SSNR Noise Reduction Chip



Samsung Video Presenter

# SVP-5300



The SVP-5300 can be integrated with a PC or laptop and other AV kit. Through a USB 2.0 Port, You can transfer images more quickly to a PC and produces an impressionistic effect on the transferred image through Digital Imaging Effect Processing (DIEP) with free USB software. Moreover, it can display and record real motion pictures at up to 25 fps and capture them just like a 3D scanner.

Extra Flexibility  
with Free-angle  
head & body

The SVP-5300 has a multi-articulated structure for extra flexibility. The camera head is capable of rotating freely up to 270 degrees and up and down up to 120 degrees. This flexibility enables users to present materials on the working surface of size or type along with various visual aids in other areas such as behind the unit or on a wall.

Sharper Pictures  
with SSNR Chip

With SSNR (Samsung Super Noise Reduction), an outstanding noise elimination technology exclusively developed by Samsung, images are now much more distinctive as common noise in the digital image processing is dramatically reduced. More detailed image enables users to deliver effective and compelling presentations.





# A Portable & Flexible Product for Visual Communications

The Samsung SVP-5300 is a tool for creating polished multimedia presentations. Equipped with fast USB 2.0 port and SSNR noise elimination chip, this smart device now delivers much sharper pictures within a second. Furthermore its multi-articulated design helps users create their own presentation with higher flexibility and space-efficiency.



Iting  
bles  
regardless




## Powerful 32X Zoom (16X Optical with 2X Digital)

Samsung's high-speed 16X auto focus zoom gives the user plenty of scope for creative presentations. Even small letters in books, pictures, maps, and catalogues can be easily magnified on the screen.




## Convenient Digital Functions

The unit's convenient digital functions ensures high-impact visual communications. When you press the Freeze button, the image is holding on the screen. It is useful to replace the script or picture with next one. Plus, the object image can be rotated through the Image Flip & Mirror function including the zoom control.



## Positive and Negative Image Converts

Positive and negative image can both be projected on to the screen or the monitor for a clear and vivid image equivalent to the quality of a printed image.



## Easy to use Remote controller

All the functions are easily controlled by use of remote controller



## Versatility by using Lightbox


By using optional light box(SLB-5), a variety of films such as transparencies, photo-negative films, X-ray films, and slides films can be projected onto a screen. This backlight illuminator can be easily attached and removed.

# SAMSUNG

## Specifications

Item	SVP-5300
<b>Optics</b>	
Zoom Lens	F 1.4 ~ 2.7, f=3.9 ~ 62.4, 16X Power Zoom (2X Digital Zoom)
Shooting Area	210 X 297mm (Max.), 18 X 24mm (Min.)
Focus	Manual / Auto Focus (Selectable)
Iris	Manual / Auto Iris (Fine Level Adjustment)
Head Lamp	Fluorescent (Attachable to Head Arm)
<b>Image</b>	
Pick-up Device	1/4" IT CCD (NTSC : 410,000 Pixels) (PAL : 470,000 Pixels)
Effective Pixels	NTSC : 768 (H) X 494 (V), PAL : 752(H) X 582(V)
Sync. System	Internal Sync.
Resolution	H : 470 TV Lines
SSNR	Built-in
White Balance	Manual / ATW
S/N Ratio	More than 48dB
Negative / Positive	Selectable
On-Screen Display	Built-in
Input Selection	2 Channels
Output	Video (RCA / 75 Ω Unbalanced) X 2, S-Video
Audio	Input : Microphone X 1, RCA X 2, Output : RCA X 2
<b>Digital Process</b>	
Image Rotation	Mechanical : Max. 270° Electrical : Flip / Mirror
Image Freeze	Available
Preset	Available (up to 4 user settings)
<b>PC Interface</b>	
Image Transfer to PC	USB 2.0
RS-232C	Built-in
<b>General</b>	
Remote Controller	Supplied
Carrying Case	Supplied
Power	Source 100-240V(AC), 50 / 60Hz (Free Voltage), +12V DC Adaptor Consumption 30W
Dimensions	Presenter At operation : 7.2"(W) X 16.3"(D) X 19"(H), 182(W) X 430(D) X 482(H)mm Lightbox A4 Size, Panel 11.0"(W) X 7.2"(D) X 1"(H), 279(W) X 183(D) X 2.5(H)mm
Weight	3.7Kg (8.2lbs)

## Dimensions

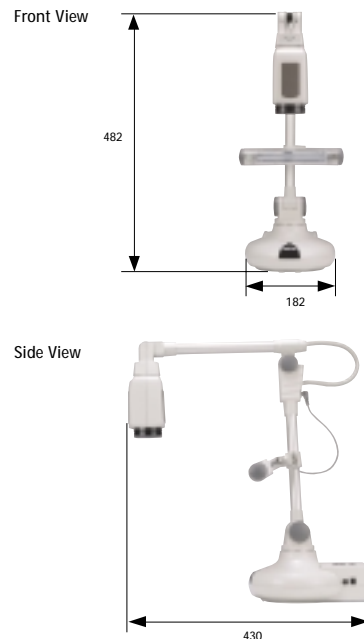


## Optional Accessories



Lightbox (SLB-5)

## Connection

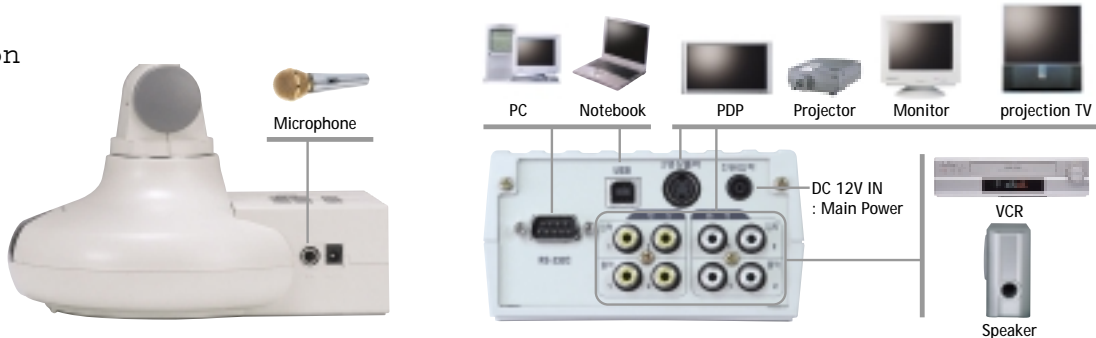

[www.samsungpresenter.com](http://www.samsungpresenter.com)

Design and specifications are subject to change without notice.

### SAMSUNG TECHWIN CO., LTD

145-3 Sangdaewon 1-Dong, Jungwon-Gu,  
Sungnam, Kyungki-Do, Korea 462-121  
TEL: +82-31-740-8137~8141 FAX: +82-31-740-8145

### SAMSUNG OPTO-ELECTRONICS AMERICA, INC. ELECTRONIC IMAGING DIV.

40 Seaview Drive, Secaucus NJ 07094, U.S.A  
TEL: +1-201-902-0347 FAX: +1-201-902-0429

### SAMSUNG TECHWIN MOSCOW OFFICE

LENNINGRADSKY PR-KT, 37-A. KORR.14  
RUSSIA, 125167, MOSCOW  
TEL: +7-095-258-9296, 9298 FAX: +7-095-258-9297

### SAMSUNG OPTO-ELECTRONICS UK LTD.

Samsung House, 1000 Hillswood Drive  
Hillswood Business Park Chertsey Surrey KT16 OPS  
TEL: +44 (0)1932 455 308 FAX: +44 (0)1932 455 325

### TIANJIN SAMSUNG OPTO-ELECTRONICS CO.,LTD

7 Pingchang Rd, Nankai Dist, Tianjin, P.R China  
Post Code : 300190  
TEL: +86-22-27614724 (33821) FAX: +86-22-27616514

■ DISTRIBUTED BY

