

TOSHIBA



sx3500

A perfect combination:
brightness & SXGA+ resolution

- SXGA+ resolution (1,400 x 1,050)
- 3,500 ANSI-lumens
- lens shift-function
- HD-ready
- power zoom and focus



Liquid Cristal Display (LCD)



sx3500

These projectors are opportune for all conferences.

Display 3 x 0,99" Polysilicon TFT with MLA

Resolution SXGA 1,400 x 1,050

Brightness 3,500 ANSI-lumens

Colour reproduction 16.7 mio. colours

Contrast 650:1

Projection format 4:3 switchable to 16:9

Lamp 310 W (TLPLX45LAMP)

Maximal lamp life up to max. 2,000 hours

Lens F = 1.7 - 2.4 / f = 31 - 46 mm

Zoom 1.5 x

Frequency (hor./vertical) 15 - 91 kHz / 50 - 120 Hz

Projection front, rear and ceiling

Digital keystone correction vertical & horizontal +/- 10°

Picture size (diagonal) 1.0 m - 12.7 m

Projection distance 1.2 m - 23.2 m

Input signals NTSC / PAL / SECAM, 525i (480i), 525p (480p), 625i (576i), 750p (720p @ 50/60 Hz), 1,125i (1,180i @ 50/60 Hz), VGA, SVGA, XGA, SXGA & SXGA+, UXGA (compr.)

Inputs computer input: 1 x D-sub 15, 1 x BNC (5 x), 1 x M1-D (HDCP), 1 x RCA jack, 1 x S-video jack (4-pin mini-DIN), 1 x RCA jack (3 x) component, 1 x BNC (3 x), 1 x RCA jack (2 x) video, 2 x stereo mini jack computer, MAC 13", MAC 16"

Outputs 1 x D-sub 15 mini, 1 x stereo mini jack

Serial Interface 1 x 9 pin D-sub für RS-232C

Power supply AC 100 - 120 V, 220 - 240 V

loudspeaker 2 x 1 W

Dimensions (W x H x D) 420 x 320 x 160 mm

Weight 7.7 kg


Operation noise normal 42 dB / ECO Mode 38 dB

Specials power zoom, power-lens shift 10:1 to 1:1 (vertical), power-focus, lens shift

Accessories remote control with laserpointer and batteries, owners manual (CD ROM), RGB-, RCA-, audio and power-cable

Options ceiling mount, MD-1 cable, spare lamp

Optional lenses short fix lens (16 mm), short zoom lens (31 - 46 mm), long zoom lens (46 - 82 mm), ultra long zoom lens (80 - 144 mm)

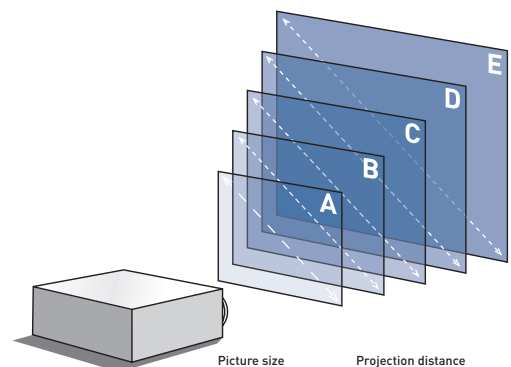

Picture size	Projection distance
A 1.0 m	1.2-1.8 m
B 2.5 m	3.0-4.6 m
C 3.8 m	4.6-6.9 m
D 6.4 m	7.7-11.6 m
E 12.7 m	15.5-23.2 m