

Prezentační technika

Cílkova 640/22

142 00 Praha 4 - Kamýk

tel, fax: 241 470 258, mob. tel.: 603 145 766, 605 244 712

e-mail: info@datavideomedia.cz, www.datavideomedia.cz



Zúčastněte se


CASIO



Projektor vybavený Laser & LED hybridním světelným zdrojem s životností až 20.000 hodin, bez obsahu rtuti

Nová řada projektorů řady Standard: Všestranný pomocník pro mobilní využití i pevné instalace

- Nový, revoluční světelný zdroj
10 x delší životnost světelného zdroje
v provedení s vysokotlakými rtuťovými výbojkami
- Světelný výkon až 3000 ANSI Lm
- Výrazné omezení provozních nákladů
- Konstantní světelný výkon
- Brilantní a přirozené podání barev
- Dynamické nastavení jasu
- Mobi Show (možnost prezentace z mobilních zařízení)
- Spotřeba < 1W v pohotovostním režimu
- 1,5 x optický zoom
- USB připojení pro prezentaci bez PC
- Bezdrátový přenos dat Wi-Fi u modelů s USB
- Rychlý start a okamžité vypnutí
- HDMI připojení
- 3D ready

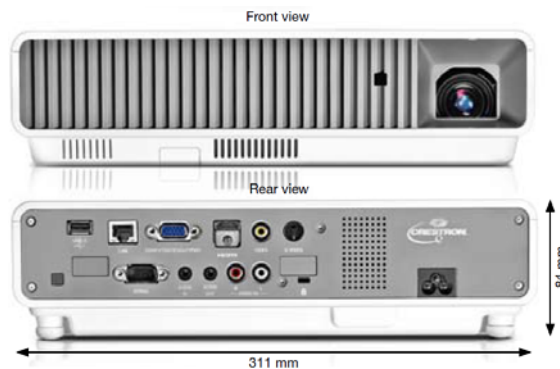

Více informací získáte na www.datavideomedia.cz
nebo na www.casio-projectors.eu

Banka
ČSOB divize Poštovní spořitelna Praha 2
Č.účtu: 211585707/0300

IČO: 27621880
DIČ: CZ27621880

Standard series technical specifications at a glance:

		XGA	WXGA
Display	Technology: Resolution:	0,55" DLP® chip 1,024 x 768 pixels	0,65" DLP® chip 1,280 x 800 pixels
Light source	Type: Life expectancy:	Laser and LED hybrid technology Approx. 20,000 hours	
Projected image	Contrast ratio: Colour depth:	1,800:1 (tele mode) 16.7 million colours	
Projection lens	Type: Projection ratio: Offset: Min. distance: Focus:	1.5x optical zoom 1.64–2.46:1 (distance: image width) 100% 1 m Manual	1.5x optical zoom 1.32–1.93:1 (distance: image width) 83% 1 m Manual
Projection	Projection screen size: 60" screen (diagonal): 100" screen (diagonal):	30" to 300" 2.0 to 3.0 m distance 3.4 to 4.9 m distance	35" to 300" 1.7 to 2.5 m distance 2.9 to 4.9 m distance
Keystone correction	Vertical (automatic/manual):	+30°/±30°	
Interface terminals	Computer: Digital input: Video: Component video: Audio: RS-232C serial: LAN connector ² : USB ² : Compatible USB devices ^{2,3} :	Inputs: 2 x 15-pin RGB mini D-sub (VGA) 1 x HDMI type A (480p–1,080p) 1 x S-Video 1 x RCA (composite) Optional adapter to fit 15-pin RGB mini D-sub (VGA) Inputs: 2 x 3.5 mm stereo mini jack RCA pin terminal (L/R) x 1 Output: 1 x 3.5 mm stereo mini jack 1 x 9-pin mini D-sub 1 x RJ45 1 x USB type A USB flash drive, CASIO YW-3 wireless adapter, CASIO YC-400/YC-430 multifunctional camera system	
Wireless connectivity		IEEE 802.11 b/g	
Additional functions		Direct Power On, Direct Power Off, rear projection, image freeze, blank screen, ceiling mount	
Audio volume	Speaker output: Operating noise:	5 W 33 dB (default mode) /28 dB (safe mode)	
Power consumption	Operating: Standby:	190 W (Bright mode)/150 W (Eco mode) 0,4 W	
Computer compatibility	Max. resolution (compressed):	UXGA (1,600 x 1,200 pixels)	
Video compatibility	Video standards: Signals:	PAL-N, PAL-M, PAL 60, SECAM, NTSC Composite video, YCbCr, YPbPr	
On-screen menu	Languages:	Japanese, English, Spanish, German, Italian, French, Swedish, Chinese (simplified/traditional), Korean, Turkish, Portuguese, Russian	
Included accessories		15-pin RGB mini D-sub cable (VGA), composite video cable, power cable, infrared remote control, user manual on CD, carry case	
Optional accessories	DLP 3D projection:	Active-shutter lenses and software	
Other specs	Dimensions (w x h x d): Weight: Body colour: Operating temperature: Warranty:	311 x 244 x 82 mm 3,9 kg White 5–35 °C Projector: 3 years Light source: 3 years or 6,000 hours (whichever comes first)	

² USB models only.

³ Functionality can only be guaranteed for products specifically designated by CASIO. Visit the CASIO website for more details about the USB flash drives supported by this device.

Models	ANSI lumens (eco)	Resolution	USB/WLAN
XJ-M140	2,500 (1,750)	XGA (4:3)	-
XJ-M145	2,500 (1,750)	XGA (4:3)	USB/WLAN
XJ-M150	3,000 (2,100)	XGA (4:3)	-
XJ-M155	3,000 (2,100)	XGA (4:3)	USB/WLAN
XJ-M240	2,500 (1,750)	WXGA (16:10)	-
XJ-M245	2,500 (1,750)	WXGA (16:10)	USB/WLAN
XJ-M250	3,000 (2,100)	WXGA (16:10)	-
XJ-M255	3,000 (2,100)	WXGA (16:10)	USB/WLAN



DLP REGISTERED TRADEMARK
 The DLP®-Logo is a registered trademark of Texas Instruments.